




PRIZOR VIZTECH LIMITED

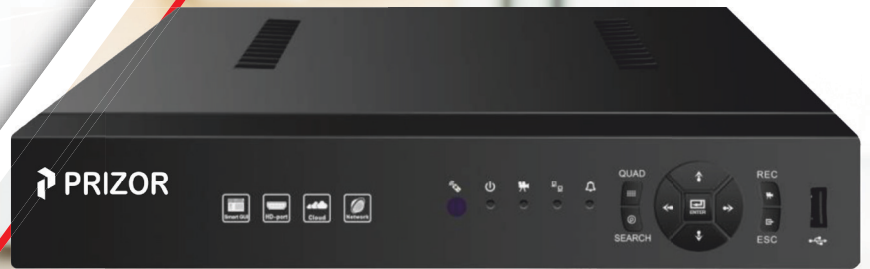

RP-HDV2402-2M-PRO 24CH H.265 DVR

KEY FEATURES

- ◆ 5 IN 1 HYBRID, SUPPORT HDTVI, AHD, CVI,
- ◆ ANALOG, NETWORK FIVE SIGNAL ACCESS
- ◆ THE TRANSMISSION DISTANCE OF ANALOG COAXIAL CABLE CAN REACH 600M,
- ◆ AND THE VIDEO TRANSMISSION IS RELIABLE
- ◆ SUPPORT UTC FUNCTION, DIRECTLY SET THE CAMERA THROUGH COAXIAL CABLE
- ◆ SUPPORT ONVIF PROTOCOL TO ENSURE THE INTERCONNECTION WITH THE NETWORK CAMERA
- ◆ SUPPORT MOBILE PHONE MONITORING, SUPPORT CLOUD SERVICE,
- ◆ REALIZE APP PREVIEW + REMOTE VIDEO PLAYBACK
- ◆ MOBILE APP-PRIZORPRO
- ◆ COXIAL AUDIO SUPPORTED TVI MODE ONLY

PRIME SERIES



SPECIFICATIONS

MODEL/NAME		RP-HDV2402-2M-PRO
VIDEO INPUT	VIDEO INPUT	24 CH
	COAXIAL HD INPUT	720P/960H/1080P
	NETWORK VIDEO INPUT	24 CH 720P/960P/1080P
	NETWORK VIDEO ACCESS BANDWIDTH	150MBPS(Default 70MBPS IF WANT 150MBPS NEED TO CONNECT WITH GIGA SWITCH)
	AUDIO INPUT	8 CH,RCA PORT
AUDIO AND VIDEO OUTPUT	HDMI OUT PUT	1 CH,HDMI PORT ; RESOLUTION:1920X1080P/60HZ;
	VGA OUT PUT	1 CH,VGA PORT ; RESOLUTION:1920X1080P/60HZ
	AUDIO OUTPUT	RCA AUDIO OUTPUT*1, HDMI AUDIO OUTPUT
	CVBS OUTPUT	1 CH,BNC PORT, (OPTIONAL)
VIDEO AND AUDIO CODEC SPEC.	COMPRESSION	H.264
	PLAYBACK	8 CH 720P/8 CH 1080P-H PLAYBACK/4 CH 1080P PLAYBACK
	ANALOG VIDEO ENCODING RESOLUTION	1080N(960X1080)@15FPS ; 720P@16FPS ; 960H@25FPS IP-1080P Supported Mode-We can select Hybrid mode as per requirement
	ANALOG VIDEO CODING RATE	512 KBPS ~ 3MBPS
	STREAM TYPE	AUDIO AND VIDEO STREAMING / VIDEO STREAMING,SUPPORT VBR/ CBR
	AUDIO COMPRESSION	G.711
RECORDING MANAGEMENT	RECORDING MODE	TIMING , MOTION DETECTION , ALARM
	PLAYBACK MODE	REGULAR PLAYBACK
	BACKUP MODE	USB BACKUP AND NETWORK BACKUP,BACKUP BY TIME



SPECIFICATIONS

HDD	STORAGE TYPE	SUPPORT 2 SATA INTERFACE(OPTIONAL 4SATA)
	STORAGE CAPACITY	EACH INTERFACE SUPPORTS A HARD DISK WITH A MAXIMUM CAPACITY OF 6TB
EXTERNAL INTERFACE	NETWORK INTERFACE	1 RJ45 100M ADAPTIVE ETHERNET PORT
	USB INTERFACE	2 USB2.0 PORTS
	ALARM INTERFACE	NA
NETWORK	NETWORK PROTOCOLS	NTP, SMTP, PPPOE, DHCP
OTHERS	POWER INPUT	DC 12 V & 4AMP
	POWER CONSUMPTION (WITHOUT HDD)	≤15W
	OPERATING TEMP.	-10°C--+55°C
	OPERATING HUMIDITY	10%--90%
	SIZE	43X32.5X7CM
	WEIGHT (WITHOUT HDD)	≤3KG

