




PRIZOR VIZTECH LIMITED

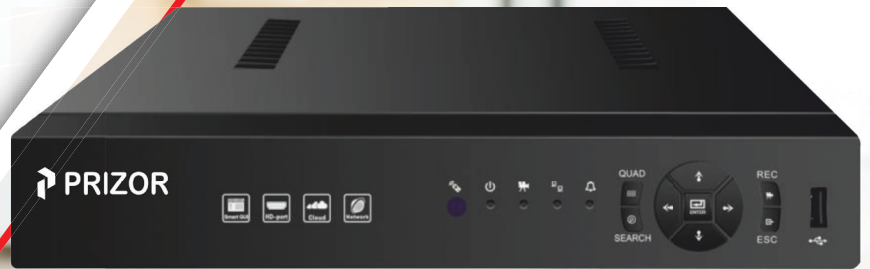

RP-HDV3202-2M-PRO

32CH H.265 DVR

KEY FEATURES

- ◆ 5 IN 1 HYBRID, SUPPORT HDTVI, AHD, CVI,
- ◆ ANALOG, NETWORK FIVE SIGNAL ACCESS
- ◆ THE TRANSMISSION DISTANCE OF ANALOG COAXIAL CABLE CAN REACH 600M,
- ◆ AND THE VIDEO TRANSMISSION IS RELIABLE
- ◆ SUPPORT UTC FUNCTION, DIRECTLY SET THE CAMERA THROUGH COAXIAL CABLE
- ◆ SUPPORT ONVIF PROTOCOL TO ENSURE THE INTERCONNECTION WITH THE NETWORK CAMERA
- ◆ SUPPORT MOBILE PHONE MONITORING, SUPPORT CLOUD SERVICE,
- ◆ REALIZE APP PREVIEW + REMOTE VIDEO PLAYBACK
- ◆ MOBILE APP-PRIZORPRO

PRIME SERIES

H.265



1800-123-3699



www.prizor.in



SPECIFICATIONS

| MODEL/NAME | | RP-HDV3202-2M-PRO |
|-----------------------------|----------------------------------|--|
| VIDEO INPUT | VIDEO INPUT | 32 CH |
| | COAXIAL HD INPUT | 720P/960H/1080P |
| | NETWORK VIDEO INPUT | 32 CH 720P/960P/1080P |
| | NETWORK VIDEO ACCESS BANDWIDTH | 150MBPS(DEFAULT 70MBPS IF WE WANT 150MBPS SO NEED TO CONNECT GIGA SWITCH) |
| | AUDIO INPUT | 8 CH,RCA PORT |
| AUDIO AND VIDEO OUTPUT | HDMI OUT PUT | 1 CH,HDMI PORT ; RESOLUTION:1920X1080P/60HZ; |
| | VGA OUT PUT | 1 CH,VGA PORT ; RESOLUTION:1920X1080P/60HZ |
| | AUDIO OUTPUT | RCA AUDIO OUTPUT*1, HDMI AUDIO OUTPUT |
| | CVBS OUTPUT | 1 CH,BNC PORT, (OPTIONAL) |
| VIDEO AND AUDIO CODEC SPEC. | COMPRESSION | H.264 |
| | PLAYBACK | 8 CH 720P/8 CH 1080P-H PLAYBACK/4 CH 1080P PLAYBACK |
| | ANALOG VIDEO ENCODING RESOLUTION | 1080N(960X1080)@15FPS ; 720P@16FPS ; 960H@25FPS IP-1080P Supported Mode-We can select Hybrid mode as per requirement |
| | ANALOG VIDEO CODING RATE | 512 KBPS ~ 3MBPS |
| | STREAM TYPE | AUDIO AND VIDEO STREAMING / VIDEO STREAMING,SUPPORT VBR/ CBR |
| | AUDIO COMPRESSION | G.711 |
| RECORDING MANAGEMENT | RECORDING MODE | TIMING , MOTION DETECTION , ALARM |
| | PLAYBACK MODE | REGULAR PLAYBACK |
| | BACKUP MODE | USB BACKUP AND NETWORK BACKUP,BACKUP BY TIME |



SPECIFICATIONS

| | | |
|---------------------------|---------------------------------|--|
| HDD | STORAGE TYPE | SUPPORT 2 SATA INTERFACE(OPTIONAL 4SATA) |
| | STORAGE CAPACITY | EACH INTERFACE SUPPORTS A HARD DISK WITH A MAXIMUM CAPACITY OF 6TB |
| EXTERNAL INTERFACE | NETWORK INTERFACE | 1 RJ45 100M ADAPTIVE ETHERNET PORT |
| | USB INTERFACE | 2 USB2.0 PORTS |
| | ALARM INTERFACE | NA |
| NETWORK | NETWORK PROTOCOLS | NTP、SMTP、PPPOE、DHCP |
| OTHERS | POWER INPUT | DC 12 V & 4AMP |
| | POWER CONSUMPTION (WITHOUT HDD) | ≤15W |
| | OPERATING TEMP. | -10℃ -- +55℃ |
| | OPERATING HUMIDITY | 10%--90% |
| | SIZE | 43X32.5X7CM |
| | WEIGHT (WITHOUT HDD) | ≤3KG |

