




PRIZOR VIZTECH LIMITED

PRIAC-15T-5S
1.5 TON 5 STAR AC

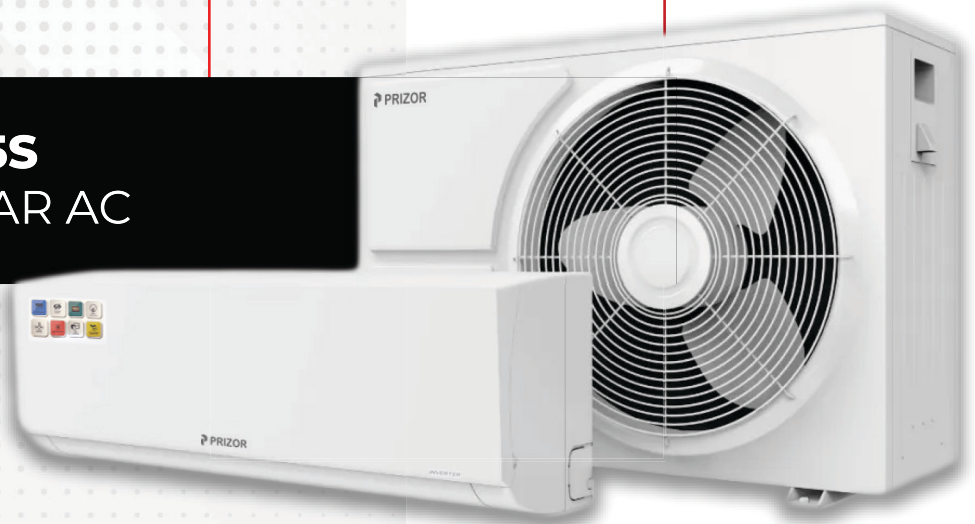

Air Conditioner

KEY FEATURES

- ◆ ALL-IN-ONE AUTO-CONVERTIBLE PRIZOR AIR CONDITIONERS ADJUST THE COOLING CAPACITY AUTOMATICALLY BASIS THE TEMPERATURE AND HUMIDITY.
- ◆ INVERTER TECHNOLOGY: THIS FEATURE ADJUSTS THE COMPRESSOR SPEED TO PROVIDE A QUIETER OPERATION AND SIGNIFICANT ENERGY SAVINGS. INVERTER TECHNOLOGY ENSURES ...
- ◆ OWING TO ITS ANTI-DUST FILTER, THIS AC EFFECTIVELY PURIFIES THE AIR BY CAPTURING DUST, ALLERGENS, AND OTHER AIRBORNE IMPURITIES, ENSURING YOUR HOME REMAINS ...
- ◆ STABILIZER-FREE-OPERATION. CRUISE'S ENHANCED STABILIZER-FREE OPERATION PREVENTS VOLTAGE FLUCTUATIONS WITHOUT COMPROMISING ON THE SAVINGS AND COMFORT
- ◆ 100% COPPER PIPING WITH INNER GROOVED TUBES. LONG LASTING, FAST COOLING ; AIR COOLED PCB. CONSISTENT PCB FUNCTION ; AUTOMOTIVE GRADE COATING ON ODU. ALL-WEATHER ...
- ◆ AMBIENT TEMPERATURE (COOLING/HEATING) IN DEGREE CELSIUS. 52 DEGREE CELSIUS. RATE CURRENT. 5 AMPS.
- ◆ AUTO-CLEAN FUNCTION AUTOMATICALLY CLEANS AND DRIES THE INSIDE OF THE AIR CONDITIONER INDOOR UNIT. IN ORDER TO KEEP THE AIR CONDITIONER IN OPTIMUM ...



3D
Air Flow



Cooling
Up to 54°



Air Throw
52 Feet



Stabilizer
Inside



Energy
Saving

1800-123-3699  www.prizor.in



SPECIFICATIONS

Indoor Unit

Power supply		Ph-V-Hz	1 Phase-230V-50Hz
Indoor fan motor	Model		PRIAC-1.5T-3S
	Old Model		NA
	Input	W	35
	Capacitor	uF	N/A
Indoor coil	Speed(Tu/Hi/Mi/Lo)	r/min	1350/1180 /950 / 850
	a.Number of rows		2R/16HP
	b.Tube pitch(a)x row pitch(b)	mm	21 x 12.7
	c.Fin spacing	mm	19"
	d.Fin type (code)		Slit-Blue
	e.Tube outside dia.and type	mm	7 & Grooved
	f.Coil length x height x width	mm	710 x 336 x 25.4
	g.Number of circuits/Hp		4 In 4 Out/16
Indoor air flow (Turbo)		m3/h	980
Indoor noise level (Hi/Mi/Lo)		dB(A)	49.4/45.6/42.3
Indoor unit	Dimension(L*W*H)	mm	900*300*240
	Packing (L*W*H)	mm	1000*370*345
	Net/Gross weight	Kg	10.6 (Net)/ 13.3(Gross)
FEATURES			
Indoor Unit Display Type			Hidden Display
Airflow Control Type			Yes
Remote Control			Wireless LED
Self Cleaning			Yes
Express Cool 52°C			Yes
Dust Filter			Yes
Hot+Cool			N/A



SPECIFICATIONS

Outdoor Unit

Powersupply		Ph-V-Hz	1 Phase-230V-50Hz
Cooling	Capacity	Btu/h	17,060.50
	Cooling Capacity (Full Load)	W	5,000
	Cooling Capacity (Half Load)	W	2,500
	Heating Capacity	W	N/A
	Power Consumption (Full Load)	W	1,470
	Power Consumption (Half Load)	W	590
	Current (Full Load)	A	6.60
	Current (Half Load)	A	3.70
	ISEER	W/W	4.10
Compressor	Model		GSX102CKTA6JT8
	Type		Rotary
	Brand		Highly
	Capacity	W	N/A
	Input	W	N/A
	Rated current(RLA)	A	N/A
	Locked rotor Amp(LRA)	A	N/A
	Thermal protector		Yes
	Thermal protector position		N/A
	Capacitor	µF	N/A
	Refrigerant oil/oil charge	ml	N/A
Outdoor fan motor	Model		BENZ/95HH050R
	Input	W	54
	Capacitor	uF	3 MFD/ 440V
	Speed	r/min	900



SPECIFICATIONS

Outdoor Unit

Outdoor coil	a.Number of rows		1 R/5mm
	b.Tube pitch(a)x row pitch(b)	mm	16.5 x 12.7
	c.Fin spacing	mm	19"
	d.Fin type (code)		Slit-Bare/Blue
	e.Tube outside dia.and type	mm	7 and Grooved
	f.Coil length x height x width	mm	760/381 x 504 x 25.4
	g.Number of circuits		2 In 1 out
Outdoor noise level		dB(A)	55.7+5
Outdoor unit	Dimension(W*D*H)	mm	835*555*295
	Packing (W*D*H)	mm	925x625x355
	Net/Gross weight	Kg	25.8 (Net)/ 30.3(Gross)
Refrigerant type		R-32/Kg	0.630
Design pressure		MPa	420 PSI
Refrigerant piping	Liquid side/ Gas side	mm(inch)	OD 6.35*0.8/ OD12.7 *0.7
	Max. refrigerant pipe length	m	3.0
	Max. difference in level	m	15
Connection wiring			1.5 sq mm, 4 Core*3.0mtr
Plug type			NA
Thermostat type			NTC type
Operation temperature		°C	17~30°C
Room temperature	Indoor(cooling/ heating)	°C	27°C
	Outdoor(cooling/heating)	°C	35°C

